

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number  
**WO 03/076653 A2**

(51) International Patent Classification<sup>7</sup>: **C12Q 1/68**

(21) International Application Number: PCT/CA03/00330

(22) International Filing Date: 11 March 2003 (11.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/362,928 11 March 2002 (11.03.2002) US

(71) Applicant (for all designated States except US): SIMON FRAZER UNIVERSITY [CA/CA]; Room 2100 Strand Hall, University/Industry Liaison Office, Burnaby, British Columbia V5A 1S6 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DIPANKAR, Sen

(74) Agents: BAILEY, Thomas, W. et al.; Oyen Wiggs Green & Mutala, 480 - The Station, 601 West Cordova Street, Vancouver, British Columbia V6B 1G1 (CA).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: DNA CONFORMATIONAL SWITCHES AS SENSITIVE ELECTRONIC SENSORS OF ANALYTES



**WO 03/076653 A2**

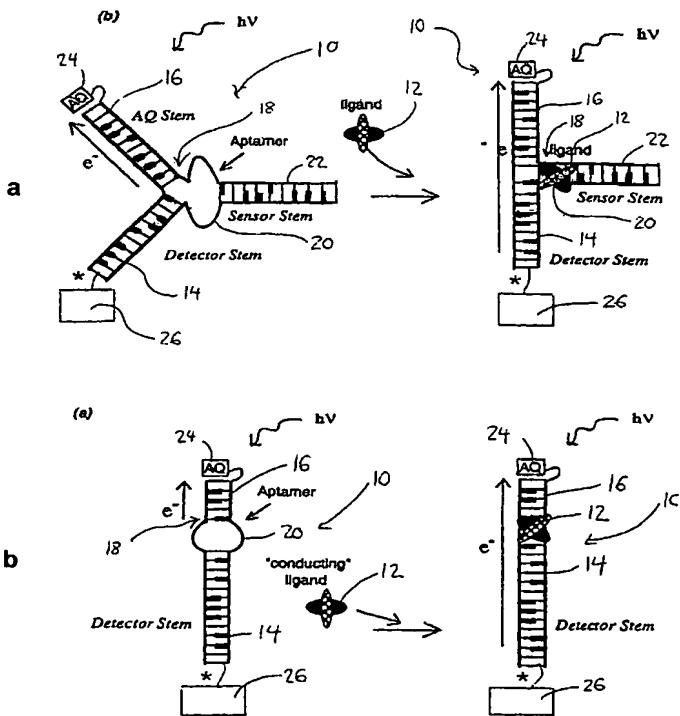

(57) Abstract: The electrical conductivity of DNA and other oligonucleotide constructs is dependent on its conformational state. Such a dependence may be harnessed for the electronic sensing of external analytes, for instance, adenosine. Such a DNA sensor incorporates an analyte receptor, whose altered conformation in the presence of bound analyte switches the conformation, and hence, the conductive path between two oligonucleotide stems, such as double-helical DNA. Two distinct designs for such sensors are described that permit significant electrical conduction through a first or "detector" double-helical stem only in the presence of the bound analyte. In the first design, current flows through the analyte receptor itself whereas, in the second, current flows in a path adjacent to the receptor. The former design may be especially suitable for certain categories of analytes, including heterocycle-containing compounds such as adenosine, whereas the latter design should be generally applicable to the detection of any molecular analyte, large or small. Since analyte detection in these DNA sensors is electronic, the potential exists for their application in rapid and automated chip-based detection of small molecules as well as of proteins and other macromolecules.